



鼎力機械有限公司

E-mail:j0939065396@hotmail.com


統編:53263327

ROOTS BLOWER & VACUUM PUMP


魯氏鼓風機 & 真空泵浦



SdB Model
SdB 系列

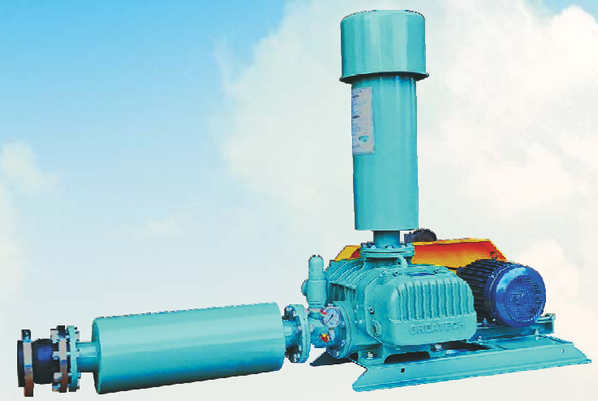

G Model
G 系列

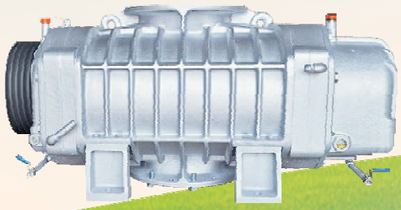

Stainless steel blower
不銹鋼鼓風機





鼎力機械有限公司

卓越設計　技術創新

GREAT DESIGN　　TECHNICAL INNOVATION

節能減碳高效率 - 魯氏鼓風機

ENERGY CONSERVATION & HIGH EFFICIENCY - GREATECH ROOTS BLOWER

SdB系列　　SdB Model

性　能

口徑: 25mm~150mm (1"~6")
風量: 0.3~34 m^3/min (18~2040 m^3/hr)
壓力: 0~6000 mmAq (0~0.6 kgf/cm^2)

Performance

Bore Size: 25mm~150mm(1"~6")
Capacity: 0.3~34 m^3/min(18~2040 m^3/hr)
Pressure: 0~6000 mmAq(0~0.6 kgf/cm^2)

特　點

三葉魯氏鼓風機
循環氣流、全機冷卻
超低噪音、超低震動
節能省電、高效率
直立設計、省空間
結構堅固、易保養
氣體潔淨、無油汙
直結傳動、免皮帶

Advantage

Tri-Lobe Roots Blower
Air circulation and cooling blower
Extremely low noise and vibration
Less electricity, high efficiency
Vertical design, space saving
Strong construction, easy maintenance
Clean air, oil-free conveying
Coupling-driven, belt-free


用　途

廢水處理、水產養殖、粉粒輸送、穀類輸送、造紙工業、食品工業、電鍍、半導體工業、化學工業...等更適合安裝於醫院、學校、飯店、住宅區、辦公大樓及其他需要安靜的場所。

Application

Waste Water Treatment, Aquaculture, Powder Conveyance, Grain Conveyance, Paper Industry, Food Industry, Electroplating Industry, Semiconductor Industry, Chemical Industry, etc.
Especially suitable for installation in hospitals, schools, hotels, residential areas, office buildings, and other places need low noise.

構造圖&材質表　Construction & Material List

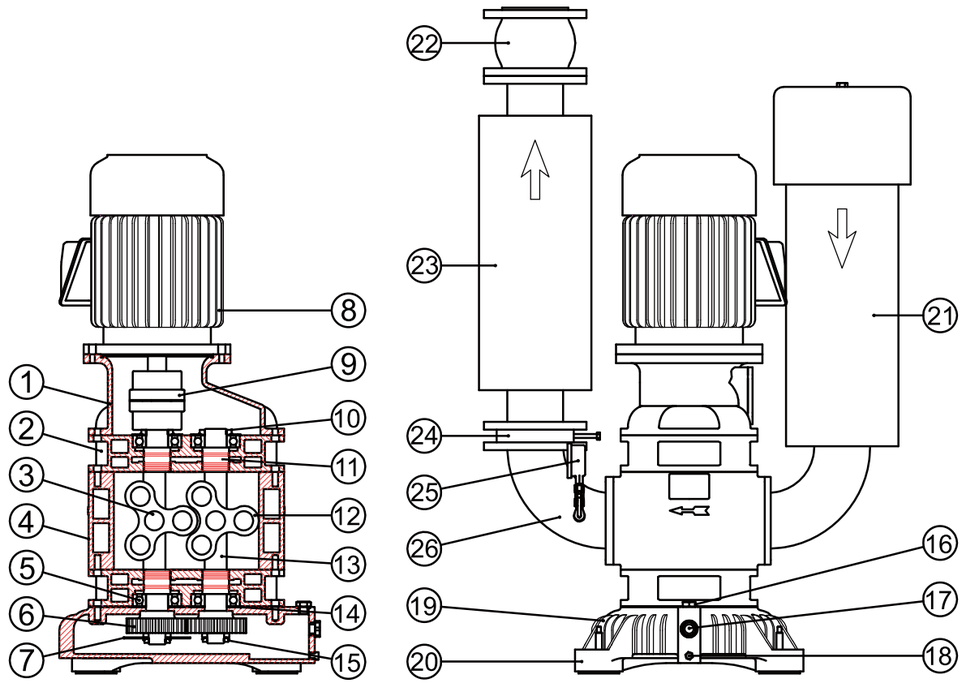

No.	Item	Material
1	Motor case 馬達座	FC250
2	Bearing case 軸承座	FC250
3	Drive shaft 主動軸	SCM440
4	Cylinder 汽　缸	FC250
5	Bearing 軸　承	SUJ2
6	Gear 齒　輪	SCM415
7	Oil splash 甩油板	SS400
8	Motor 馬　達	
9	Coupling 聯軸器	FCD500
10	Screw nut 螺　帽	SS400
11	Shaft seal 軸　封	S45C
12	Rotor 葉　輪	FCD450
13	Driven shaft 被動軸	SCM440

No.	Item	Material
14	Bearing plate 軸承壓板	SS440
15	Screw nut 螺　帽	SS400
16	Oil plug 加油塞	S45C
17	Oil gauge 油　鏡	S45C
18	Oil drainer 洩油塞	S45C
19	Gear box 齒輪箱	FC250
20	Vibration isolator 防震腳	NBR
21	Suction silencer 入口消音器	SS400
22	Flexible joint 防震接頭	NBR
23	Discharge silencer 出口消音器	SS400
24	Check valve 逆止閥	FC250
25	Pressure gauge 壓力表	SUS304
26	Elbow joint 出口彎頭	SS400

性能表 Performance Table

入口風量及出口壓力 Suction Air & Discharge Pressure


Greatech Circulating Air Cooling Roots Blower 50HZ-4P													
型號 Model	口徑 Bore (mm)	壓力 Pressure (mmAq)				風量 Capacity (m^3/min)				功率 Power (kW)			
		1000 mmAq		2000 mmAq		3000 mmAq		4000 mmAq		5000 mmAq		6000 mmAq	
		m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW
SdB25	25	0.48	0.18	0.37	0.25	0.31	0.31	0.23	0.37	0.18	0.43	0.12	0.49
SdB40	40	0.74	0.42	0.66	0.47	0.60	0.53	0.54	0.61	0.49	0.69	0.44	0.80
SdB45	40	0.96	0.53	0.86	0.66	0.78	0.78	0.70	0.89	0.63	0.99	0.57	1.07
SdB50	50	1.89	0.99	1.77	1.23	1.66	1.38	1.45	1.57	1.32	1.78	1.15	2.00
SdB60	65	2.39	1.33	2.23	1.54	2.09	1.78	1.91	2.07	1.82	2.47	1.75	2.79
SdB65	65	2.76	1.49	2.59	1.72	2.42	2.12	2.27	2.50	2.16	2.84	1.92	3.10
SdB75	80	3.38	1.79	3.18	2.31	3.00	2.67	2.80	3.12	2.62	3.71	2.53	4.25
SdB77	80	3.97	2.24	3.76	2.75	3.58	3.30	3.36	3.91	3.16	4.48	3.02	5.07
SdB80	80	4.52	2.72	4.31	3.23	4.15	3.96	3.94	4.73	3.73	5.28	3.55	5.92
SdB90	100	6.43	3.89	6.04	4.62	5.73	5.46	5.43	6.62	5.17	7.61	4.92	8.73
SdB100	100	8.24	5.54	7.78	6.19	7.37	7.25	7.00	8.18	6.68	9.27	6.40	10.5
SdB110	125	9.98	7.05	9.43	8.25	8.93	10.1	8.48	11.3	8.09	12.4	7.75	13.8
SdB125	125	11.4	7.80	10.8	8.83	10.2	10.7	9.69	12.8	9.24	14.6	8.85	16.2
SdB150	150	19.6	10.5	18.8	12.3	18.1	15.2	17.4	17.5	16.9	20.6	16.4	23.7
SdB160	150	28.0	14.8	26.7	18.1	25.5	22.1	24.4	25.8	23.4	29.2	22.6	33.1

0.37kW=0.5HP , 0.75kW=1HP , 1.5kW=2HP , 2.2kW=3HP , 3.7kW=5HP , 5.5kW=7.5HP , 7.5kW=10HP
11kW=15HP , 15kW=20HP , 18.5kW=25HP , 22kW=30HP , 30kW=40HP , 37kW=50HP , 45kW=60HP


Greatech Circulating Air Cooling Roots Blower 60HZ-4P													
型號 Model	口徑 Bore (mm)	壓力 Pressure (mmAq)				風量 Capacity (m^3/min)				功率 Power (kW)			
		1000 mmAq		2000 mmAq		3000 mmAq		4000 mmAq		5000 mmAq		6000 mmAq	
		m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW
SdB25	25	0.60	0.25	0.52	0.30	0.44	0.37	0.39	0.45	0.34	0.52	0.30	0.60
SdB40	40	1.05	0.49	0.94	0.56	0.83	0.65	0.75	0.75	0.67	0.87	0.62	1.01
SdB45	40	1.20	0.65	1.09	0.83	0.98	0.98	0.89	1.12	0.80	1.19	0.73	1.28
SdB50	50	2.23	1.12	2.10	1.39	1.97	1.55	1.88	1.79	1.81	1.94	1.72	2.14
SdB60	65	2.74	1.71	2.52	1.95	2.42	2.26	2.33	2.57	2.27	2.94	2.22	3.35
SdB65	65	3.15	1.86	2.92	2.12	2.76	2.46	2.64	2.83	2.55	3.20	2.47	3.60
SdB75	80	4.47	2.47	4.23	2.85	3.99	3.28	3.76	3.67	3.53	4.26	3.31	4.82
SdB77	80	5.33	2.89	5.07	3.38	4.81	4.03	4.57	4.62	4.33	5.25	4.11	5.83
SdB80	80	6.17	3.36	5.90	3.97	5.65	4.83	5.42	5.64	5.18	6.30	4.96	6.89
SdB90	100	8.39	4.62	7.98	5.82	7.62	6.72	7.31	7.93	7.06	9.01	6.85	10.7
SdB100	100	11.7	6.33	11.2	7.01	10.7	8.29	10.3	9.38	9.90	11.1	9.60	12.4
SdB110	125	13.9	8.08	13.2	9.25	12.6	11.2	12.1	12.6	11.7	14.1	11.3	15.7
SdB125	125	16.3	9.12	15.5	10.7	14.7	13.2	14.1	14.8	13.5	16.2	13.0	17.8
SdB150	150	24.3	11.9	23.5	14.7	22.9	18.0	22.2	21.5	21.6	24.3	21.0	27.6
SdB160	150	33.9	15.7	32.7	18.9	31.6	23.4	30.6	27.8	29.5	32.0	28.5	36.2

性能曲線 Performance Curve

50HZ-4P

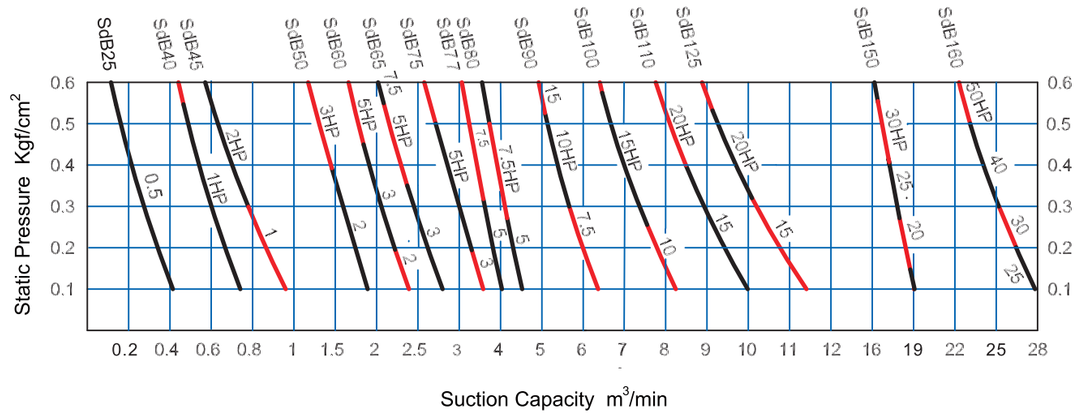


60HZ-4P

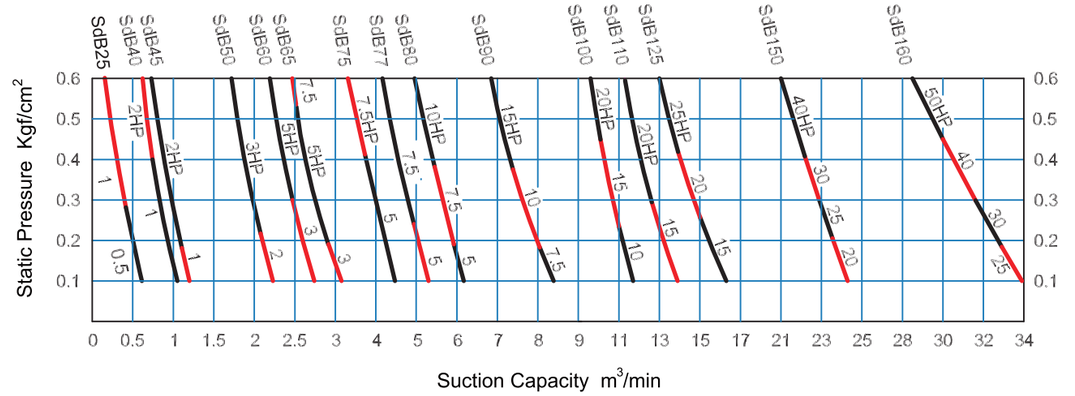


噪音曲線 Noise Curve

50HZ-4P

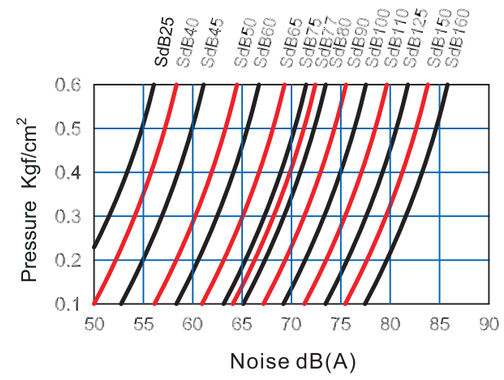


60HZ-4P

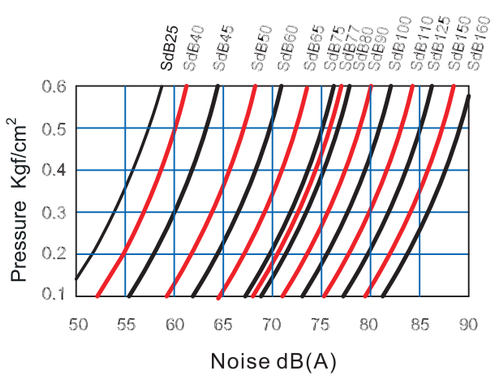

外型尺寸 Outline Dimension



外型尺寸

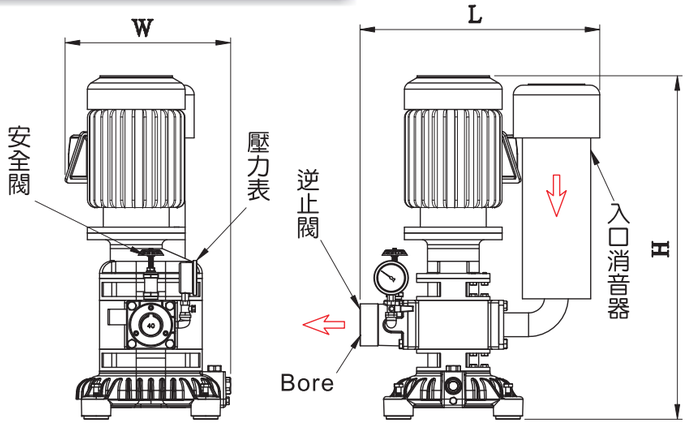


Unit=mm

型號 Model	長 L	寬 W	高 H	口徑 Bore
SdB25	478	316	607	25
SdB40	491	339	711	40
SdB45	491	339	731	40

Unit=mm

型號 Model	長 L	寬 W	高 H	口徑 Bore
SdB40	580	340	845	40
SdB45	580	340	860	40
SdB50	651	420	877	50
SdB60	700	428	929	65
SdB65	729	450	920	65
SdB75	833	467	1229	80
SdB77	833	467	1251	80
SdB80	840	460	1273	80
SdB90	949	543	1388	100
SdB100	949	579	1414	100
SdB110	1148	620	1945	125
SdB125	1148	620	1969	125
SdB150	1268	703	2055	150
SdB160	1268	790	2100	150

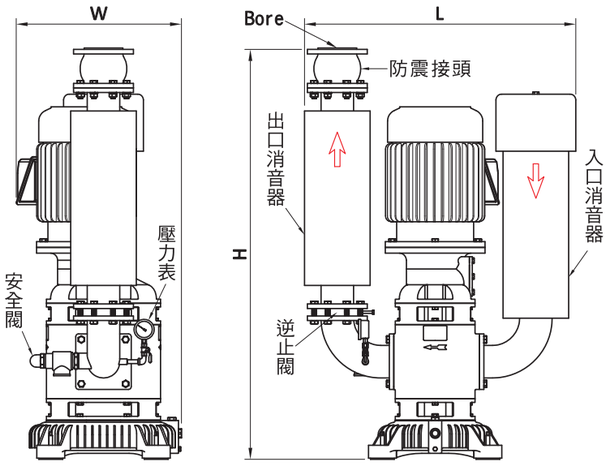

其他產品 Other Products









單位換算 Unit Conversion

壓力 Pressure

Kgf/cm²	kPa	mbar	psi	mmAq mmH₂O	Torr mmHg
1	98.0665	980.665	14.2231	10,000	735.559
0.010197	1	10	0.145	101.9716	7.50062
0.001019	0.1	1	0.0145	10.19716	0.750062
0.07031	6.895	68.95	1	703.08	51.7157
0.0001	0.009806	0.098	0.001422	1	0.073556
0.00136	0.13332	1.33321	0.019336	13.5951	1

風量 Capacity

CMM (m³/min)	CFM (ft³/min)	LPM (l/min)
1	35.32	1000
0.0283	1	28.3125
0.001	0.0353	1

功率 Power

kW	HP	PS
1	1.3404	1.3596
0.746	1	1.0143
0.7355	0.9859	1

卓越設計 技術創新

GREAT DESIGN TECHNICAL INNOVATION

節能減碳高效率 - 魯氏鼓風機

ENERGY CONSERVATION & HIGH EFFICIENCY - GREATECH ROOTS BLOWER

G/GV 系列 G/GV Model

性 能

口徑:25mm~400mm(1"~16")
風量:0.1~280 m^3/min(6~16800 m^3/hr)
壓力:單段式可達 10000 mmAq
兩段式可達 20000mmAq
真空式可達 -5000 mmAq

Performance

Bore Size: 25mm~400mm(1"~16")
Capacity: 0.1~280 m^3/min(6~16800 m^3/ hr)
Pressure: Single Section:0~10000 mmAq
Two Section:10000~20000 mmAq
As vacuum purpose: up to -5000 mmAq

特 點

三葉魯氏鼓風機
節能省電、低噪音
風量穩定、低震動
結構堅固、壽命長
氣體潔淨、無油汙

Advantage

Tri-Lobe Roots Blower
Less electricity, low noise
Stable air flow, low vibration
Strong construction, long operating lifetime
Clean air, oil-free conveying


用 途

廢水處理,水產養殖,電鍍,粉粒輸送,
穀類輸送,造紙工業,食品工業,
半導體工業,化學工業. . .等

Application

Waste Water Treatment, Aquaculture,
Electroplating Industry, Powder Conveyance,
Grain Conveyance, Grain Conveyance,
Paper Industry, Food Industry,
Semiconductor Industry, Chemical Industry, etc.

構造圖&材質表 Construction & Material List

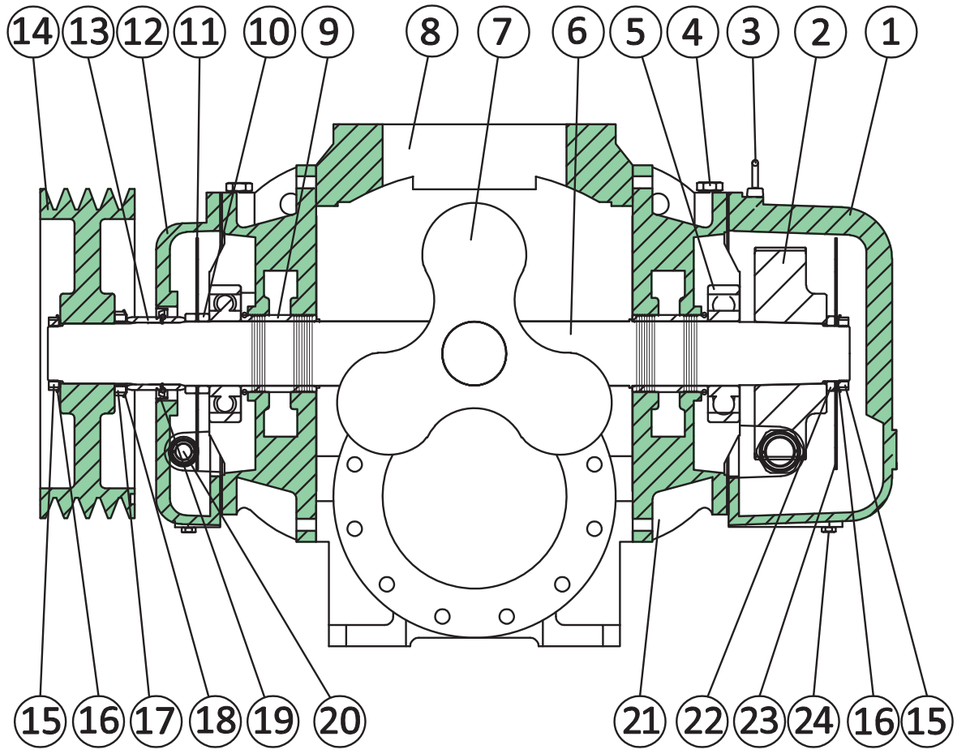

No.	Item		Material
1	齒輪箱	Gear box	FC250
2	齒輪	Gear	SCM415
3	吊環	Eye bolt	S45C
4	加油塞	Oil plug	S45C
5	軸承	Bearing	SUJ2
6	軸	Shaft	SCM440
7	葉輪	Impeller	FCD450
8	汽缸	Cylinder	FC250
9	軸封	Shaft seal	S45C
10	墊圈	Washer	SS400
11	甩油片	Oil splash	SS400
12	油箱	Oil box	FC250


No.	Item		Material
13	油封套筒	Sleeve	S45C
14	皮帶輪	Pulley	FC250
15	螺帽	Screw nut	SS400
16	墊圈	Washer	SS400
17	螺帽	Screw nut	SS400
18	墊圈	Washer	SS400
19	油封	Oil sael	Viton
20	油鏡	Oil gauge	S45C
21	側蓋	Side cover	FC250
22	墊圈	Washer	SS400
23	甩油片	Oil splash	SS400
24	洩油塞	Oil drainer	S45C

壓送型性能曲線 入口風量及出口壓力


Pressure Conveying Type Performance Curve

Suction Air & Discharge Pressure


G25

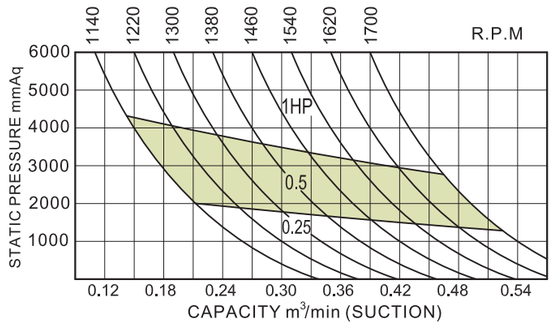


G50

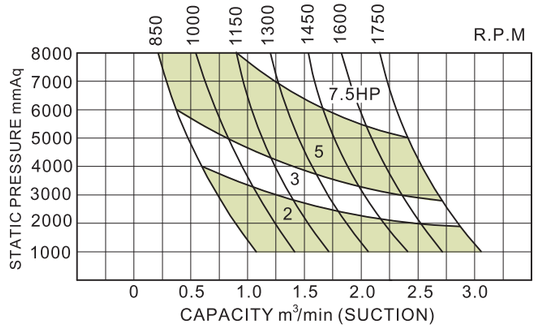


G100

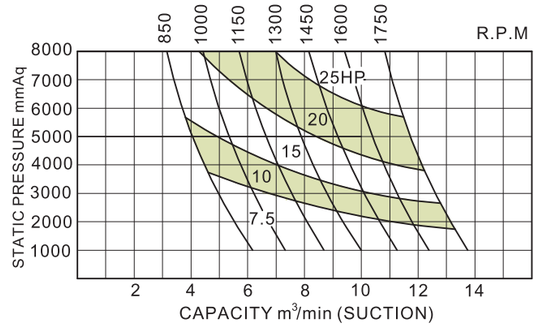


G200

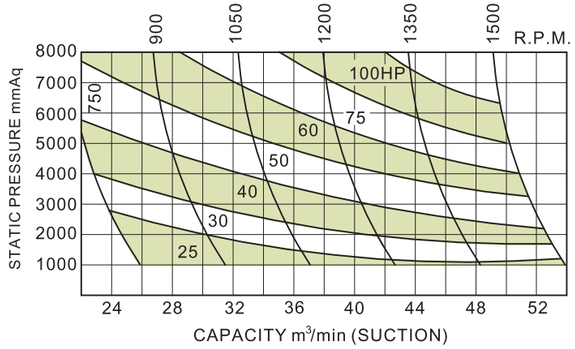


G40

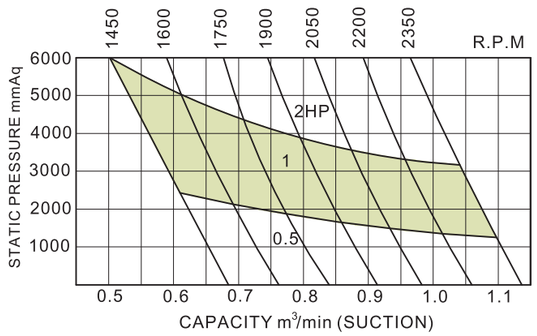


G65

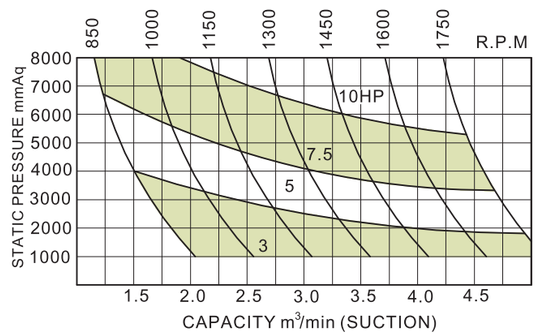


G125

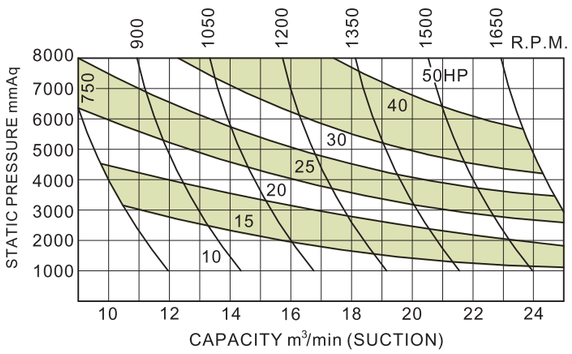


G250

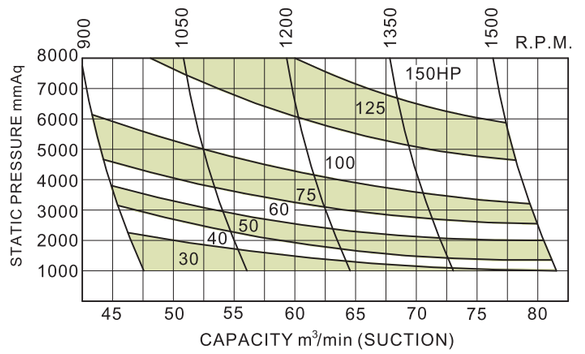


GL40

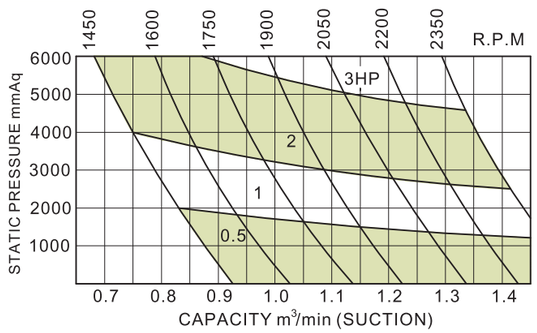


G80

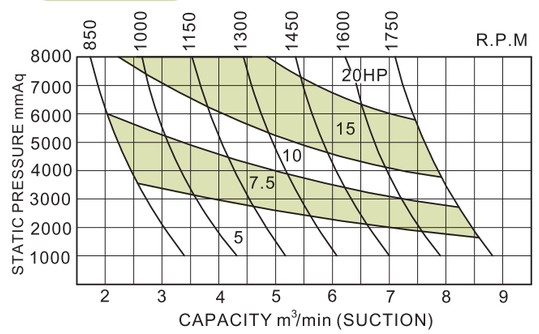

G150

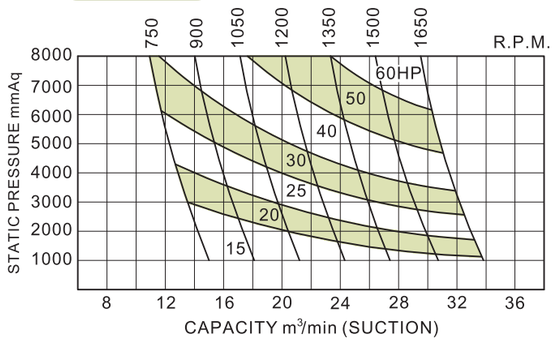

G300

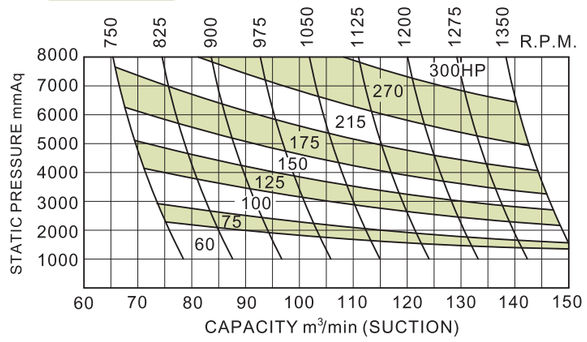


GR65~GR305 G350~G400
performance curve will be provided upon request.
GR65~GR305 G350~G400 性能表請來函洽詢

真空型性能曲線 入口風量及入口壓力


Vacuum Conveying Type Performance Curve

Suction Air & Inlet Pressure


GL40V

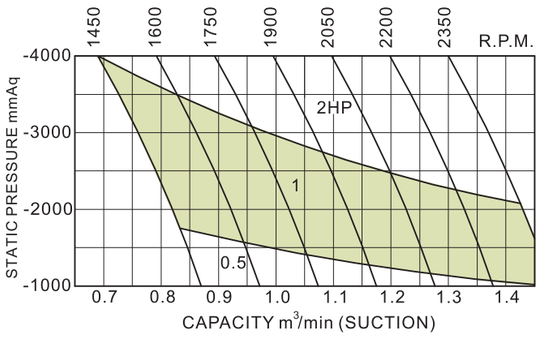


G80V

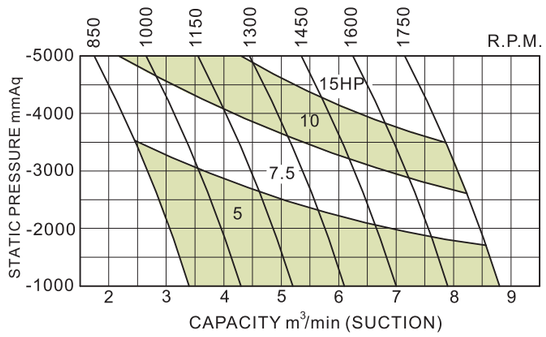


G150V

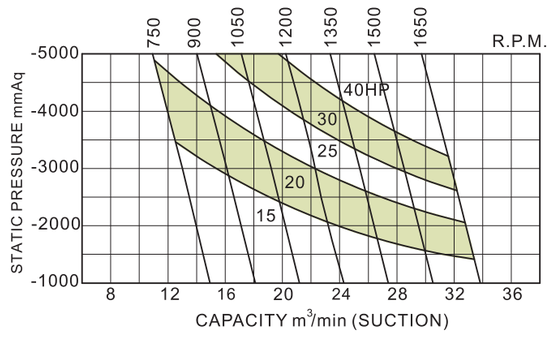


G300V

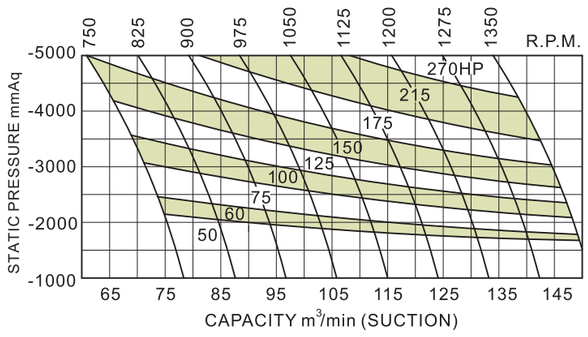


G50V

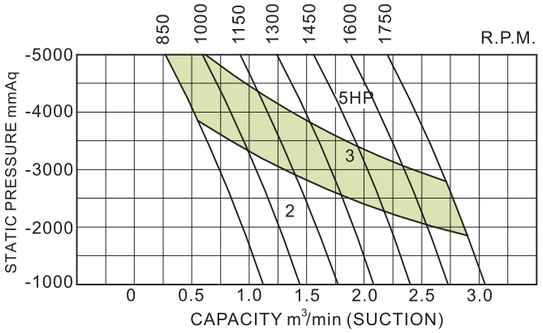

G100V

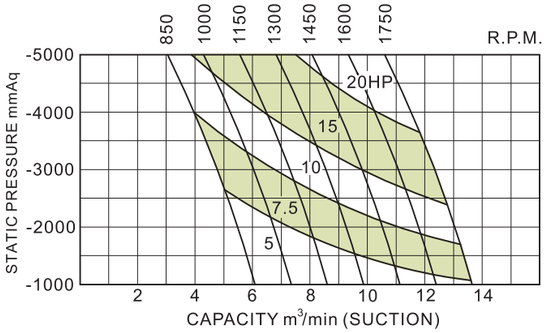


G200V

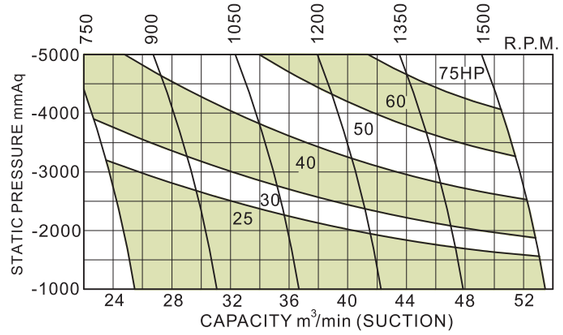





G65V

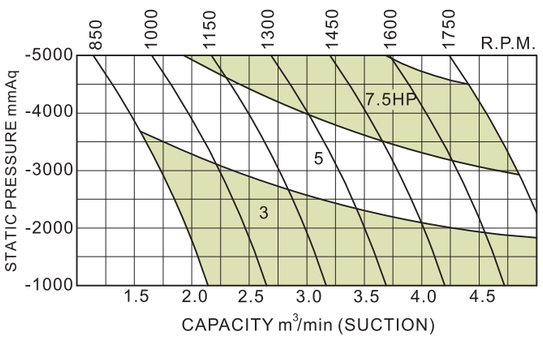

G125V

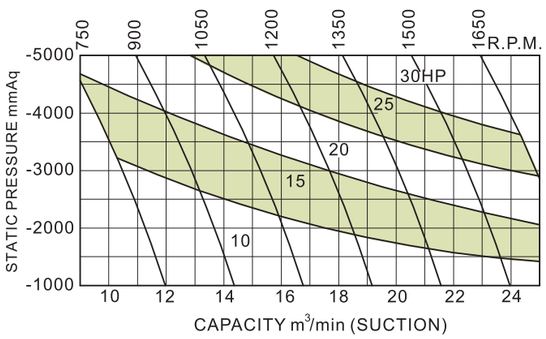

G250V

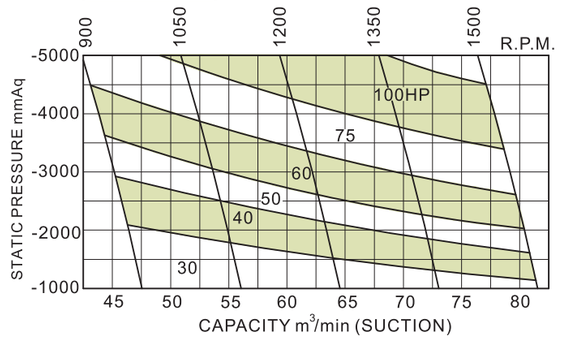

GR65V~GR305V G350V~G400V
performance curve will be provided upon request.

GR65V~GR305V G350V~G400V
性能表請來函洽詢

壓送型性能表 入口風量及出口壓力

Pressure Conveying Type Performance Table

Suction Air & Discharge Pressure

Model	RPM	Pressure(mmAq)						Capacity(m^3/min)						Power(kW)			
		1000mmAq		2000mmAq		3000mmAq		4000mmAq		5000mmAq		6000mmAq		7000mmAq		8000mmAq	
		m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW
G25	1220	0.30	0.11	0.26	0.19	0.22	0.28	0.19	0.37	0.16	0.45	0.13	0.53				
	1300	0.34	0.12	0.30	0.21	0.26	0.30	0.23	0.39	0.20	0.48	0.17	0.56				
	1380	0.38	0.12	0.34	0.22	0.30	0.32	0.27	0.42	0.24	0.51	0.21	0.59				
	1460	0.42	0.13	0.38	0.23	0.34	0.34	0.31	0.44	0.28	0.54	0.25	0.63				
	1540	0.46	0.14	0.42	0.25	0.38	0.36	0.35	0.47	0.32	0.57	0.29	0.66				
	1620	0.50	0.14	0.46	0.26	0.42	0.38	0.39	0.49	0.36	0.60	0.33	0.70				
	1700	0.54	0.15	0.50	0.27	0.46	0.40	0.43	0.51	0.40	0.63	0.37	0.73				
G40	1450	0.65	0.17	0.62	0.32	0.59	0.47	0.56	0.57	0.53	0.69	0.52	0.81				
	1600	0.74	0.18	0.68	0.36	0.65	0.52	0.63	0.63	0.61	0.76	0.59	0.89				
	1750	0.81	0.20	0.76	0.39	0.74	0.57	0.71	0.69	0.69	0.83	0.67	0.98				
	1900	0.89	0.22	0.85	0.42	0.81	0.62	0.79	0.75	0.76	0.91	0.76	1.06				
	2050	0.95	0.24	0.91	0.46	0.89	0.66	0.86	0.81	0.83	0.98	0.82	1.14				
	2200	1.03	0.25	1.00	0.49	0.97	0.71	0.94	0.87	0.92	1.02	0.90	1.23				
	2350	1.12	0.27	1.07	0.52	1.04	0.76	1.02	0.93	1.00	1.12	0.97	1.31				
GL40	1450	0.87	0.22	0.83	0.43	0.78	0.63	0.74	0.76	0.70	0.92	0.69	1.08				
	1600	0.98	0.24	0.91	0.47	0.87	0.69	0.83	0.84	0.81	1.02	0.79	1.19				
	1750	1.08	0.27	1.01	0.52	0.98	0.76	0.95	0.92	0.92	1.11	0.89	1.30				
	1900	1.19	0.29	1.13	0.56	1.08	0.82	1.06	1.00	1.02	1.21	1.01	1.41				
	2050	1.27	0.31	1.21	0.61	1.19	0.89	1.14	1.08	1.11	1.30	1.09	1.53				
	2200	1.38	0.34	1.34	0.65	1.29	0.95	1.25	1.16	1.23	1.40	1.20	1.64				
	2350	1.49	0.36	1.43	0.70	1.39	1.02	1.36	1.24	1.34	1.49	1.30	1.75				
G50	850	1.08	0.42	0.87	0.81	0.70	1.18	0.55	1.53	0.42	1.85	0.32	2.17	0.23	2.47	0.16	2.76
	1000	1.42	0.49	1.21	0.95	1.05	1.39	0.90	1.80	0.77	2.18	0.66	2.55	0.58	2.91	0.51	3.25
	1150	1.79	0.57	1.56	1.10	1.39	1.60	1.25	2.07	1.11	2.51	1.02	2.93	0.93	3.34	0.86	3.74
	1300	2.13	0.64	1.93	1.24	1.76	1.81	1.60	2.34	1.47	2.83	1.36	3.32	1.29	3.78	1.23	4.22
	1450	2.47	0.71	2.27	1.38	2.10	2.02	1.95	2.62	1.82	3.16	1.72	3.70	1.63	4.22	1.58	4.71
	1600	2.84	0.79	2.61	1.53	2.46	2.22	2.30	2.89	2.17	3.49	2.08	4.08	1.99	4.65	1.92	5.20
	1750	3.17	0.86	2.96	1.67	2.80	2.43	2.65	3.16	2.52	3.81	2.43	4.46	2.33	5.09	2.27	5.69
G65	850	2.11	0.63	1.90	1.22	1.73	1.77	1.57	2.30	1.43	2.80	1.36	3.28	1.23	3.74	1.11	4.14
	1000	2.63	0.74	2.40	1.43	2.29	2.09	2.10	2.71	1.94	3.30	1.80	3.86	1.73	4.40	1.61	4.87
	1150	3.18	0.85	2.95	1.65	2.75	2.40	2.60	3.11	2.45	3.79	2.33	4.44	2.24	5.06	2.13	5.61
	1300	3.77	0.96	3.53	1.86	3.31	2.71	3.12	3.52	2.96	4.28	2.82	5.02	2.73	5.72	2.63	6.34
	1450	4.38	1.07	4.13	2.08	3.91	3.02	3.72	3.92	3.55	4.78	3.39	5.59	3.28	6.38	3.17	7.07
	1600	5.00	1.18	4.75	2.29	4.53	3.34	4.33	4.33	4.15	5.27	4.00	6.17	3.86	7.04	3.74	7.80
	1750	5.64	1.29	5.39	2.51	5.16	3.65	4.95	4.73	4.77	5.77	4.61	6.75	4.47	7.70	4.35	8.53
G80	850	3.25	1.13	2.91	2.13	2.60	3.06	2.33	3.86	2.09	4.71	1.88	5.47	1.70	6.15	1.53	6.79
	1000	4.04	1.34	3.69	2.50	3.38	3.60	3.10	4.55	2.86	5.54	2.65	6.43	2.46	7.24	2.29	7.99
	1150	4.90	1.52	4.53	2.88	4.22	4.14	3.93	5.23	3.68	6.37	3.46	7.40	3.27	8.33	3.10	9.19
	1300	5.80	1.72	5.43	3.25	5.10	4.68	4.80	5.91	4.55	7.20	4.32	8.36	4.12	9.41	3.94	10.39
	1450	6.73	1.91	6.36	3.63	6.02	5.22	5.72	6.59	5.46	8.03	5.22	9.33	5.02	10.50	4.83	11.59
	1600	7.70	2.11	7.31	4.00	6.97	5.76	6.66	7.27	6.39	8.86	6.15	10.29	5.94	11.59	5.75	12.79
	1750	8.68	2.31	8.29	4.38	7.94	6.30	7.62	7.96	7.35	9.69	7.10	11.25	6.89	12.67	6.70	13.99

GR65~GR305 G350~G400
performance table will be provided upon request.
GR65~GR305 G350~G400 性能表請來函洽詢

Model	RPM	Pressure(mmAq)						Capacity(m^3/min)						Power(kW)			
		1000mmAq		2000mmAq		3000mmAq		4000mmAq		5000mmAq		6000mmAq		7000mmAq		8000mmAq	
		m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW
G100	850	5.97	1.59	5.34	3.09	4.78	4.34	4.28	5.41	3.85	6.59	3.46	7.65	3.11	8.65	2.81	9.53
	1000	7.11	1.88	6.49	3.64	5.94	5.10	5.45	6.36	5.03	7.75	4.65	9.00	4.31	10.18	4.02	11.21
	1150	8.37	2.16	7.75	4.18	7.21	5.87	6.72	7.32	6.29	8.91	5.92	10.35	5.59	11.71	5.29	12.89
	1300	9.64	2.44	9.02	4.73	8.48	6.63	7.98	8.27	7.57	10.08	7.18	11.70	6.85	13.23	6.56	14.57
	1450	10.94	2.72	10.33	5.27	9.78	7.40	9.29	9.23	8.86	11.24	8.48	13.06	8.15	14.76	7.85	16.25
	1600	12.21	3.00	11.60	5.82	11.05	8.16	10.56	10.18	10.13	12.40	9.75	14.41	9.41	16.29	9.12	17.93
	1750	13.43	3.28	12.82	6.36	12.28	8.93	11.79	11.14	11.37	13.57	10.98	15.76	10.65	17.81	10.36	19.62
G125	750	11.86	3.02	11.30	5.85	10.76	8.19	10.25	10.63	9.76	12.42	9.29	14.55	8.85	16.58	8.43	17.99
	900	14.17	3.55	13.56	6.88	12.97	9.64	12.41	12.50	11.88	14.62	11.37	17.11	10.88	19.50	10.41	21.16
	1050	16.54	4.08	15.90	7.91	15.29	11.08	14.70	14.38	14.13	16.81	13.59	19.68	13.07	22.43	12.57	24.34
	1200	18.97	4.61	18.33	8.94	17.71	12.53	17.11	16.25	16.53	19.00	15.97	22.25	15.43	25.36	14.91	27.51
	1350	21.48	5.14	20.85	9.97	20.25	13.97	19.66	18.13	19.08	21.20	18.53	24.82	17.99	28.28	17.46	30.69
	1500	24.06	5.68	23.47	11.01	22.90	15.42	22.34	20.00	21.79	23.39	21.26	27.38	20.74	31.21	20.24	33.86
	1650	26.71	6.21	26.18	12.04	25.67	16.86	25.17	21.88	24.67	25.58	24.19	29.95	23.71	34.13	23.25	37.03
G150	750	15.58	3.87	14.99	7.50	14.41	10.50	13.85	13.62	13.32	15.93	12.81	18.65	12.32	21.25	11.84	23.06
	900	18.52	4.55	17.89	8.82	17.29	12.35	16.70	16.03	16.14	18.74	15.59	21.94	15.06	25.01	14.56	27.13
	1050	21.51	5.23	20.88	10.14	20.27	14.21	19.68	18.43	19.11	21.55	18.55	25.23	18.01	28.76	17.49	31.20
	1200	24.56	5.91	23.96	11.46	23.37	16.06	22.80	20.84	22.25	24.36	21.71	28.52	21.18	32.51	20.66	35.27
	1350	27.66	6.60	27.12	12.79	26.59	17.91	26.07	23.24	25.56	27.17	25.06	31.82	24.57	36.26	24.08	39.34
	1500	30.83	7.28	30.38	14.11	29.93	19.77	29.49	25.64	29.05	29.98	28.62	35.11	28.20	40.01	27.78	43.41
	1650	34.06	7.96	33.72	15.43	33.39	21.62	33.06	28.05	32.73	32.80	32.41	38.40	32.09	43.76	31.77	47.48
G200	600	19.03	5.05	17.92	9.72	16.94	13.91	16.03	17.83	15.56	21.43	14.88	24.78	14.26	27.89	13.71	30.80
	750	25.22	6.31	24.02	12.15	23.32	17.39	22.42	22.29	21.64	26.79	20.97	30.98	20.36	34.86	19.86	38.50
	900	30.87	7.57	29.71	14.58	28.98	20.87	28.14	26.74	27.24	32.15	26.71	37.18	26.18	41.84	25.67	43.20
	1050	36.73	8.83	35.56	17.01	34.86	24.35	34.01	31.20	33.25	37.15	32.59	43.37	31.95	48.81	31.54	53.90
	1200	42.15	10.10	41.32	19.44	40.27	27.82	39.41	35.66	38.67	42.87	38.02	49.57	37.46	55.78	37.02	61.59
	1350	47.89	11.36	47.04	21.87	46.03	31.30	45.22	40.12	44.55	48.23	44.06	55.77	43.54	62.75	43.07	69.29
	1500	53.21	12.62	52.68	24.30	52.16	34.78	51.49	44.57	50.83	53.59	50.22	61.96	49.53	69.73	49.03	76.99
G250	600	30.43	7.54	28.95	14.30	27.76	20.54	26.23	26.46	24.89	31.79	24.09	36.72	23.21	41.01	22.24	45.53
	750	38.93	9.42	37.61	17.87	36.56	25.68	35.19	33.08	34.00	39.74	33.29	45.90	32.51	51.27	31.65	56.92
	900	47.43	11.30	46.27	21.45	45.35	30.81	44.16	39.69	43.12	47.68	42.50	55.07	41.81	61.52	41.06	68.30
	1050	55.92	13.19	54.94	25.02	54.15	35.95	53.12	46.31	52.23	55.63	51.70	64.25	51.11	71.77	50.47	79.68
	1200	64.42	15.07	63.60	28.60	62.94	41.08	62.09	52.92	61.35	63.58	60.90	73.43	60.41	82.03	59.87	91.07
	1350	72.92	16.95	72.26	32.17	71.74	46.22	71.05	59.54	70.46	71.52	70.10	82.61	69.71	92.28	69.28	102.45
	1500	81.42	18.84	80.93	35.75	80.53	51.35	80.02	66.15	79.57	79.47	79.31	91.79	79.01	102.53	78.69	113.83
G300	750	78.50	18.20	75.90	34.00	73.60	49.80	71.50	65.60	69.60	81.60	68.00	97.60	66.60	113.80	65.40	130.10
	825	87.60	20.00	85.00	37.40	82.70	54.80	80.60	72.20	78.70	89.70	77.10	107.40	75.70	125.10	74.50	143.80
	900	96.70	21.80	94.10	40.80	91.80	59.70	89.70	78.80	87.80	97.90	86.20	117.10	84.80	136.50	83.60	156.40
	975	105.80	23.60	103.20	44.20	100.90	64.70	98.80	85.30	96.90	106.00	95.30	126.90	93.90	147.90	92.70	169.00
	1050	114.90	25.50	112.30	47.50	110.00	69.70	107.80	91.90	106.00	114.20	104.40	136.70	103.00	159.30	101.80	182.40
	1125	124.00	27.30	121.40	50.90	119.00	74.70	116.90	98.40	115.10	122.30	113.40	146.40	112.10	170.60	110.90	195.30
	1200	133.00	29.10	130.50	54.30	128.10	79.70	126.00	105.00	124.20	130.50	122.50	156.20	121.10	182.00	120.00	208.90
	1275	142.10	30.90	139.50	57.70	137.20	84.60	135.00	111.60	133.10	138.70	131.50	165.90	130.10	193.40	128.90	221.50
	1350	151.20	32.70	148.60	61.10	146.30	89.60	144.20	118.10	142.30	146.80	140.70	175.70	139.30	204.80	137.30	234.10

真空型性能表 入口風量及入口壓力

Vacuum Conveying Type Performance Table

Suction Air & Inlet Pressure


Model	RPM	Pressure(mmAq)								Capacity(m^3/min)								Power(kW)							
		-1000mmAq		-2000mmAq		-2500mmAq		-3000mmAq		-3500mmAq		-4000mmAq		-4500mmAq		-5000mmAq		-1000mmAq		-2000mmAq		-2500mmAq		-3000mmAq	
		m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW
GL40V	1450	0.87	0.22	0.82	0.43	0.78	0.53	0.76	0.60	0.71	0.68	0.69	0.76					1.08	0.27	1.00	0.52	0.98	0.64	0.98	0.72
	1600	0.98	0.24	0.90	0.47	0.86	0.59	0.86	0.66	0.82	0.75	0.79	0.83					1.19	0.29	1.12	0.56	1.07	0.70	1.09	0.78
	1750	1.08	0.27	1.00	0.52	0.98	0.64	0.98	0.72	0.93	0.82	0.89	0.91					1.27	0.31	1.20	0.61	1.18	0.75	1.18	0.84
	1900	1.19	0.29	1.12	0.56	1.07	0.70	1.09	0.78	1.03	0.89	1.01	0.99					1.38	0.34	1.33	0.65	1.27	0.81	1.29	0.90
	2050	1.27	0.31	1.20	0.61	1.18	0.75	1.18	0.84	1.12	0.96	1.09	1.07					1.40	0.36	1.42	0.70	1.38	0.86	1.40	0.96
	2200	1.38	0.34	1.33	0.65	1.27	0.81	1.29	0.90	1.24	1.04	1.20	1.15												
	2350	1.40	0.36	1.42	0.70	1.38	0.86	1.40	0.96	1.35	1.11	1.30	1.22												
G50V	850	1.02	0.42	0.84	0.81	0.74	0.99	0.63	1.18	0.53	1.36	0.37	1.53	0.28	1.70	0.14	1.87								
	1000	1.35	0.49	1.17	0.95	1.07	1.18	0.96	1.39	0.85	1.59	0.71	1.80	0.61	2.00	0.47	2.19								
	1150	1.68	0.57	1.51	1.10	1.40	1.35	1.29	1.59	1.18	1.84	1.04	2.07	0.94	2.30	0.81	2.53								
	1300	2.01	0.64	1.84	1.24	1.74	1.52	1.63	1.81	1.52	2.08	1.37	2.34	1.28	2.60	1.14	2.85								
	1450	2.34	0.71	2.17	1.38	2.07	1.71	1.96	2.01	1.85	2.31	1.70	2.61	1.61	2.90	1.47	3.18								
	1600	2.68	0.78	2.50	1.52	2.40	1.88	2.29	2.22	2.28	2.56	2.03	2.88	1.94	3.20	1.80	3.51								
	1750	3.01	0.86	2.83	1.66	2.73	2.05	2.62	2.43	2.51	2.79	2.36	3.16	2.27	3.50	2.13	3.84								
G65V	850	2.15	0.67	1.97	1.30	1.85	1.60	1.73	1.90	1.60	2.18	1.45	2.46	1.30	2.73	1.12	2.99								
	1000	2.68	0.79	2.50	1.53	2.39	1.89	2.26	2.23	2.13	2.57	1.98	2.89	1.82	3.21	1.65	3.52								
	1150	3.21	0.90	3.04	1.76	2.93	2.17	2.79	2.57	2.66	2.95	2.51	3.33	2.36	3.69	2.18	4.05								
	1300	3.75	1.03	3.56	1.99	3.45	2.45	3.36	2.90	3.19	3.34	3.05	3.77	2.89	4.17	2.72	4.58								
	1450	4.27	1.15	4.10	2.22	3.99	2.73	3.85	3.24	3.73	3.73	3.57	4.19	3.42	4.66	3.24	5.11								
	1600	4.81	1.26	4.64	2.45	4.52	3.01	4.39	3.57	4.25	4.47	4.11	4.63	3.96	5.14	3.78	5.63								
	1750	5.35	1.38	5.16	2.68	5.05	3.30	4.92	3.91	4.79	4.49	4.65	5.06	4.49	5.62	4.32	6.17								
G80V	850	3.34	1.14	2.91	2.17	2.68	2.66	2.33	3.13	2.16	3.57	1.88	4.00	1.59	4.41	1.27	4.80								
	1000	4.26	1.34	3.84	2.56	3.61	3.13	3.36	3.67	3.09	4.20	2.81	4.70	2.51	5.19	2.19	5.65								
	1150	5.19	1.53	4.77	2.94	4.53	3.59	4.28	4.22	4.02	4.83	3.73	5.41	3.44	5.97	3.12	6.50								
	1300	6.12	1.74	5.70	3.32	5.46	4.07	5.21	4.78	4.94	5.46	4.67	6.11	4.37	6.74	4.05	7.35								
	1450	7.05	1.94	6.62	3.70	6.39	4.54	6.14	5.33	5.87	6.09	5.59	6.82	5.29	7.52	4.97	8.20								
	1600	7.97	2.14	7.55	4.09	7.31	5.00	7.07	5.88	6.80	6.72	6.52	7.52	6.22	8.30	5.90	9.04								
	1750	8.90	2.33	8.48	4.48	8.24	5.47	7.99	6.42	7.73	7.35	7.45	8.23	7.15	9.07	6.83	9.90								
G100V	850	5.96	1.59	5.35	3.05	5.00	3.73	4.61	4.37	4.21	4.99	3.78	5.59	3.32	6.17	2.82	6.73								
	1000	7.26	1.87	6.64	3.58	6.29	4.37	5.91	5.15	5.51	5.88	5.08	6.59	4.61	7.26	4.12	7.92								
	1150	8.56	2.15	7.94	4.11	7.59	5.03	7.21	5.92	6.81	6.76	6.38	7.57	5.91	8.35	5.42	9.10								
	1300	9.86	2.44	9.24	4.65	8.89	5.69	8.51	6.69	8.11	7.64	7.67	8.56	7.21	9.44	6.72	10.29								
	1450	11.15	2.71	10.54	5.19	10.19	6.34	9.81	7.46	9.40	8.53	8.97	9.55	8.51	10.53	8.01	11.48								
	1600	12.45	2.99	11.83	5.72	11.48	7.00	11.10	8.23	10.70	9.41	10.27	10.54	9.81	11.62	9.31	12.66								
	1750	13.75	3.28	13.13	6.26	12.78	7.66	12.40	9.00	12.00	10.29	11.57	11.52	11.10	12.71	11.61	13.84								
G125V	750	11.86	3.02	11.35	5.85	10.81	6.96	10.35	8.29	9.81	9.19	9.32	10.18	8.87	10.94	8.43	11.15								
	900	14.17	3.55	13.62	6.88	13.04	8.19	12.54	9.75	11.94	10.82	11.40	11.98	10.90	12.87	10.41	13.12								
	1050	16.54	4.08	15.98	7.91	15.36	9.42	14.85	11.21	14.20	12.44	13.63	13.78	13.09	14.80	12.57	15.09								
	1200	18.97	4.61	18.42	8.94	17.80	10.65	17.28	12.68	16.62	14.06	16.02	15.57	15.46	16.73	14.91	17.06								
	1350	21.48	5.14	20.96	9.97	20.35	11.88	19.85	14.14	19.18	15.68	18.58	17.37	18.02	18.67	17.46	19.03								
	1500	24.06	5.68	23.59	11.01	23.01	13.11	22.56	15.60	21.90	17.31	21.33	19.17	20.79	20.60	20.24	20.99								
	1650	26.71	6.21	26.31	12.04	25.80	14.33	25.42	17.06	24.80	18.93	24.26	20.97	23.76	22.53	23.25	22.96								

Model	RPM	Pressure(mmAq)								Capacity(m^3/min)								Power(kW)							
		-1000mmAq		-2000mmAq		-2500mmAq		-3000mmAq		-3500mmAq		-4000mmAq		-4500mmAq		-5000mmAq		-1000mmAq		-2000mmAq		-2500mmAq		-3000mmAq	
		m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW	m^3/min	kW
G150V	750	13.72	3.39	12.93	6.49	12.50	7.94	12.04	9.33	11.54	10.66	11.00	11.94	10.43	13.16	9.84	14.35								
	900	16.89	4.07	16.11	7.79	15.69	9.52	15.22	11.20	14.71	12.79	14.18	14.32	13.61	15.80	13.02	17.22								
	1050	20.07	4.75	19.29	9.08	18.87	11.11	18.04	13.05	17.89	14.92	17.37	16.72	16.79	18.43	16.19	20.10								
	1200	23.26	5.43	22.46	10.38	22.04	12.07	21.58	14.92	21.07	17.05	20.54	19.10	19.97	21.07	19.37	22.96								
	1350	26.43	6.11	25.65	11.67	25.22	14.28	24.76	16.79	24.25	19.18	23.72	21.49	23.14	23.07	22.56	25.83								
	1500	29.61	6.78	28.83	12.97	28.41	15.87	27.93	18.66	27.43	21.32	26.90	23.87	26.33	26.34	25.73	28.70								
	1650	32.80	7.46	32.01	14.27	31.58	17.46	31.12	20.51	30.15	23.45	30.08	26.27	29.51	28.97	28.91	31.58								
G200V	600	17.52	4.91	16.47	9.41	15.88	11.51	15.31	13.52	14.64	15.46	13.89	17.32	13.16	19.10	12.34	20.82								
	750	23.36	6.14	22.31	11.75	21.72	14.38	21.15	16.90	20.48	19.33	19.73	21.64	19.00	23.87	18.18	26.02								
	900	29.20	7.38	28.15	14.11	27.56	17.27	26.99	20.28	26.32	23.18	25.57	25.97	24.84	28.65	24.02	31.23								
	1050	35.04	8.61	33.99	16.46	33.04	20.14	32.83	23.67	32.16	27.05	31.42	30.30	30.68	33.42	29.86	36.43								
	1200	40.88	9.84	39.83	18.81	39.24	23.01	38.67	27.05	38.00	30.92	37.26	34.63	36.52	38.20	35.70	41.64								
	1350	46.72	11.06	45.67	21.16	45.08	25.89	44.51	30.43	43.84	34.77	43.10	38.96	42.36	42.98	41.54	46.84								
	1500	52.56	12.29	51.51	23.52	50.92	28.77	50.35	33.81	49.68	38.64	48.94	43.29	48.20	47.76	47.38	52.05								
G250V	600	28.55	7.51	27.01	14.37	24.05	17.58	25.16	20.66	24.15	23.62	23.02	26.45	21.83	29.18	20.58	31.81								
	750	37.47	9.39	35.93	17.97	35.03	21.97	34.08	25.82	33.07	29.52	31.94	33.07	30.76	36.48	29.50	39.76								
	900	46.40	11.27	44.85	21.56	43.96	26.37	43.00	30.99	41.99	35.42	40.86	39.68	39.68	43.78	38.43	47.72								
	1050	55.32	13.14	53.78	25.14	52.88	30.76	51.93	36.15	50.91	41.33	49.79	46.29	48.60	51.06	47.35	55.66								
	1200	64.24	15.02	62.70	28.73	61.80	35.16	60.85	41.32	59.84	47.23	58.71	52.90	57.52	58.36	56.27	63.61								
	1350	73.16	16.09	71.62	32.33	70.72	39.55	69.77	46.49	68.72	53.14	67.63	59.52	66.45	65.66	65.19	71.57								
	1500	82.09	18.78	80.54	35.92	79.65	43.95	78.69	51.65	77.68	59.03	76.55	66.14	75.37	72.96	74.12	79.52								
G300V	750	78.50	18.20	75.40	35.80	73.50	44.60	71.50	56.10	69.20	73.50	66.70	88.70	63.90	102.5	60.90	110.2								
	825	87.60	20.00	84.40	39.30	82.60	49.10	80.60	61.70	78.30	80.80	75.60	97.60	72.60	112.7	69.30	121.3								
	900	96.70	21.80	93.50	42.90	91.70	53.60	89.70	67.30	87.30	88.20	84.50	106.5	81.40	123.0	77.80	132.3								
	975	105.8	23.60	102.4	46.50	100.8	58.00	98.80	72.90	96.40	95.50	93.50	115.4	90.10	133.2	86.20	143.3								
	1050	114.9	25.50	111.4	50.10	109.9	62.50	107.9	78.50	105.4	102.9	102.4	124.2	98.80	143.5	94.70	154.2								
	1125	124.0	27.30	120.5	53.60	118.9	67.00	116.9	84.10	114.4	110.2	111.3	133.1	107.5	153.7	103.1	165.3								
	1200	133.1	29.10	129.5	57.20	128.0	71.40	126.0	89.80	123.5	117.6	120.2	142.0	116.2	164.0	111.6	176.4								
	1275	142.1	30.90	138.6	60.80	137.1	75.90	135.0	95.40	132.4	124.9	129.0	150.9	124.8	174.2	119.9	187.4								
	1350	151.2	32.70	147.5	64.40	146.2	80.40	144.2	101.0	141.5	132.3	138.0	159.7	133.7	184.5	127.7	198.2								


Greatech also provides customized design and assemblies.
Stainless steel blowers with special treatment are also available.
客製化設計與組合,不銹鋼鼓風機及特殊處理亦可製作,
歡迎洽詢

噪音表 Noise Curve


G25

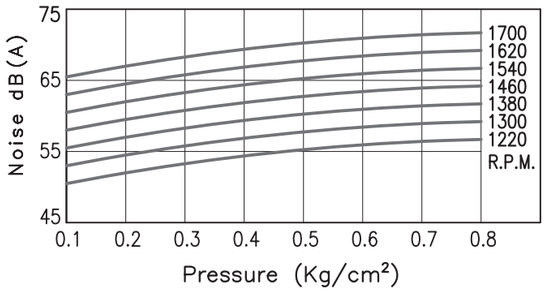


G65

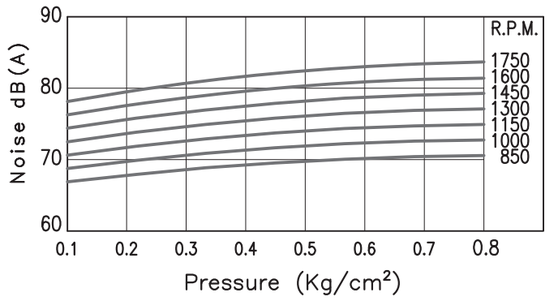


G150

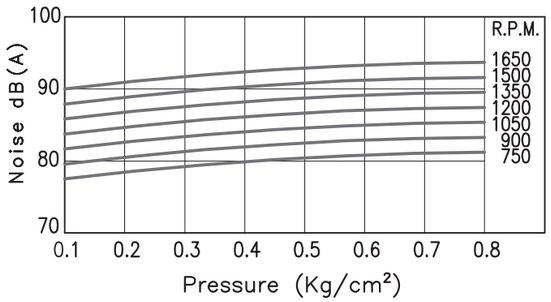


G250

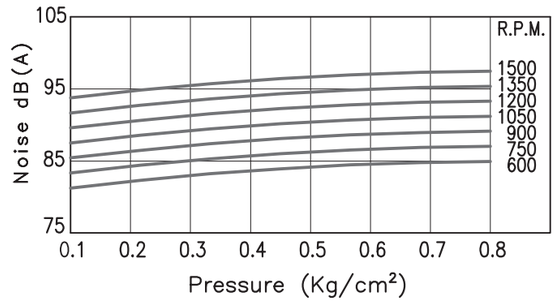


G40

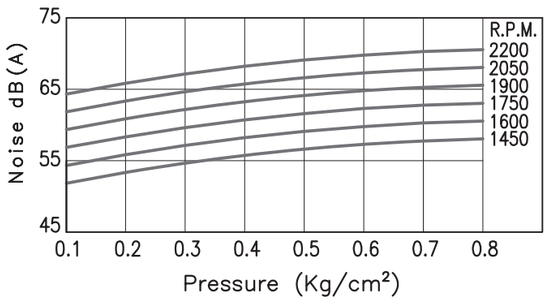


G80

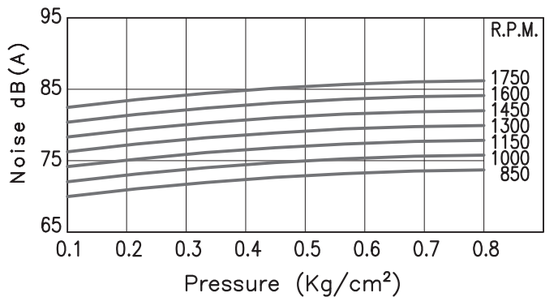


G200

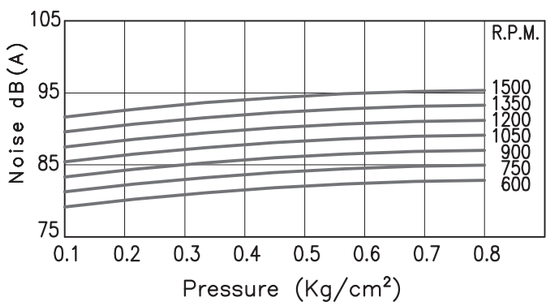


G300

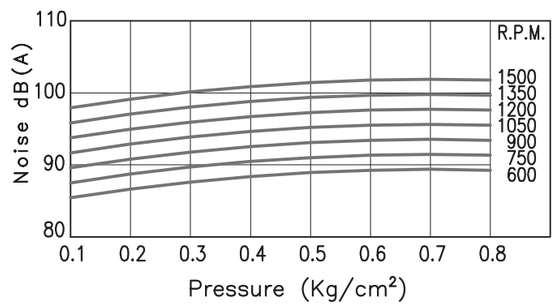


GL40

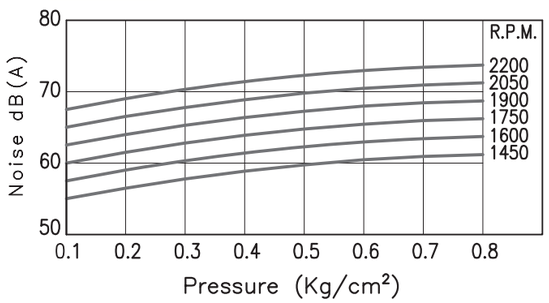


G100

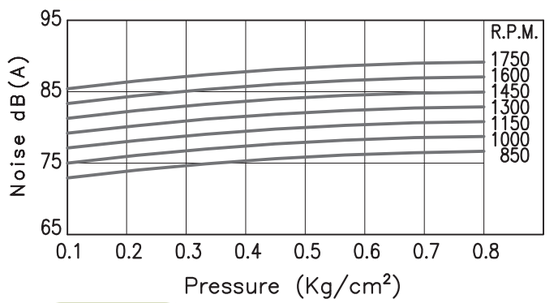

G50

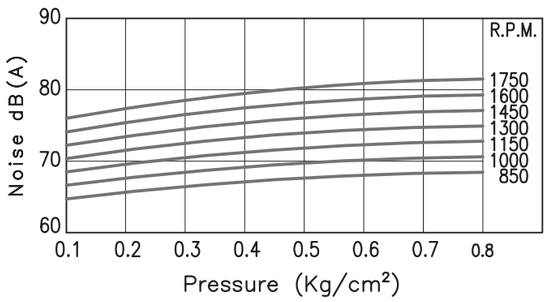

G125

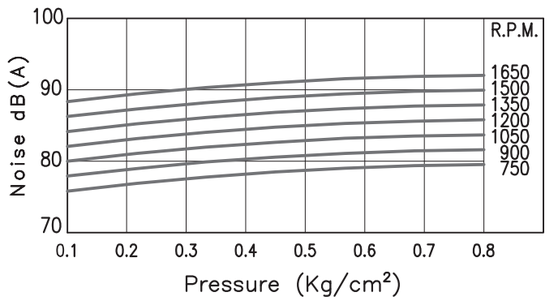

本公司噪音值系在出口配管狀態下,
距離鼓風機 1M 處所測量的平均值


Our noise level is measured at
1 meter away from the blower
with a silencer.






外型尺寸 Outline Dimension

G25-GL40

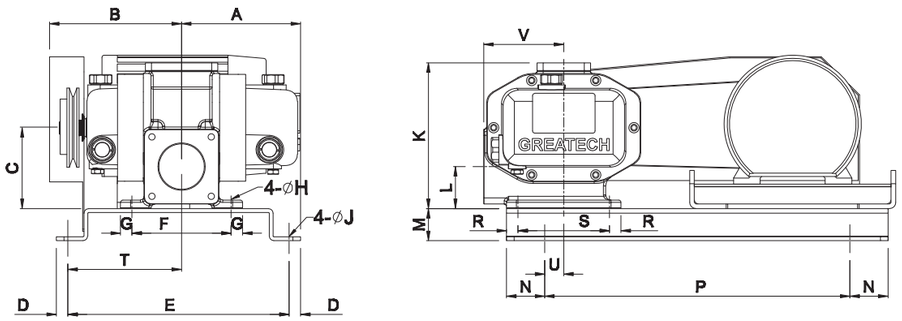


Model	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V
G25	140	158	106	15	227	95	15	10	12	191	37	45	50	350	15	120	134	25	105
G40	155	173	106	15	290	130	15	10	12	191	55	42	50	400	15	120	148	25	105
GL40	188	170	106	15	290	160	15	10	12	191	55	42	50	400	15	120	164	25	105

G50~G65

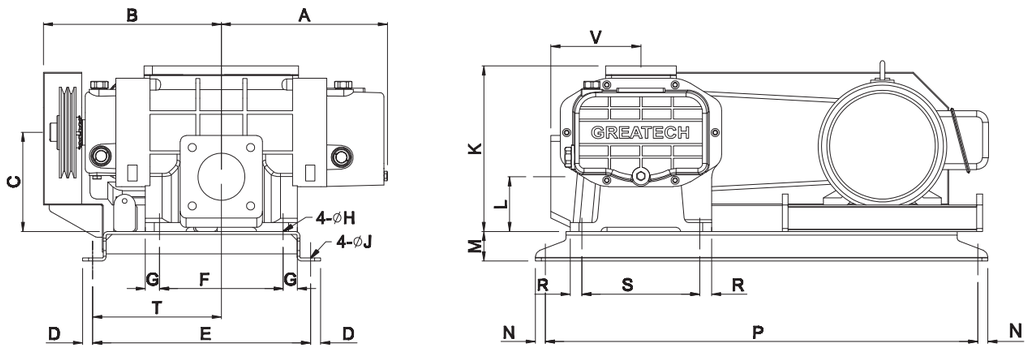


Model	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V
G50	233	259	168	17	285	130	19	15	15	278	90	50	17	734	20	200	175	162	153
G65	276	302	168	17	370	210	24	15	15	278	93	50	17	734	20	200	219	162	153

G80~G150

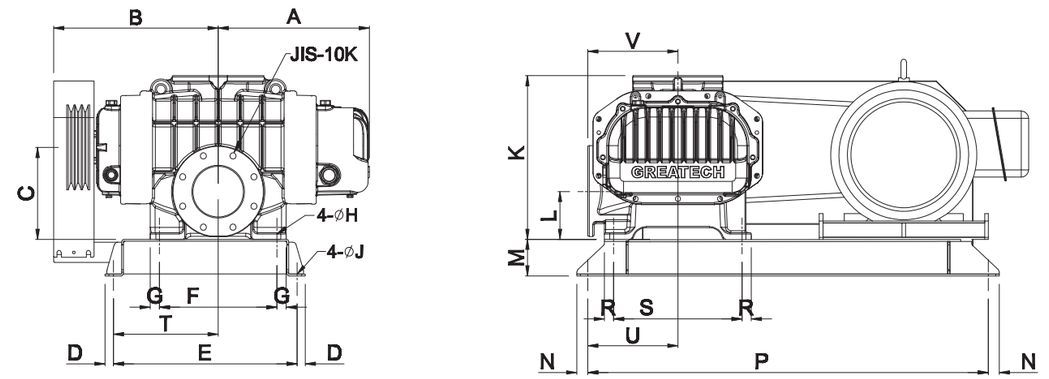

Model	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V
G80	305	345	190	17	380	190	25	19	15	350	100	65	17	885	25	250	226	187	190
G100	358	395	210	17	470	290	25	19	15	370	115	65	17	890	25	250	276	190	190
G125	412	448	250	23	500	320	25	19	19	455	130	100	30	1090	25	350	285	245	245
G150	465	500	275	23	605	425	27	19	19	470	150	100	30	1190	25	350	338	245	245


G200~G300

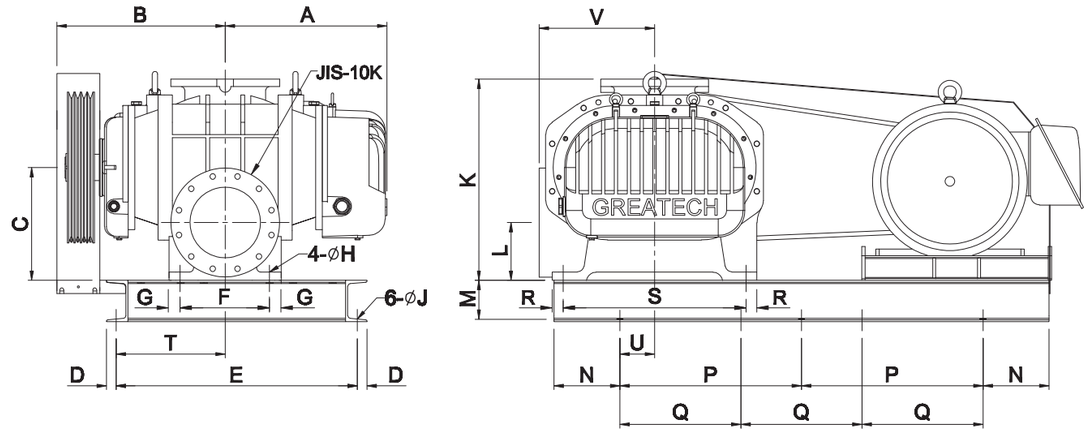

Model	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V
G200	487	522	342	30	730	270	35	23	19	610	175	125	200	550	35	550	330	105	350
G250	577	617	380	30	730	460	35	23	19	650	210	125	200	550	35	550	425	105	350
G300	780	838	455	40	1000	630	45	27	25	800	235	200	100	Q 550	45	600	540	240	430

附屬配件 Accessories


G-入口消音器 SUCTION SILENCER



Unit:mm

MODEL	A	B	C	適用機型
S50	570	65	165	G50
S65	570	65	165	G65
S80	795	80	216	G80
S100	850	100	216	G100
S125	1265	125	315	G125
S150	1275	150	345	G150
S200	1940	200	525	G200
S250	1940	250	600	G250
S300	2100	300	650	G300
S350	2145	350	700	G350


出口消音器 DISCHARGE SILENCER



Unit:mm

MODEL	A	B	C	適用機型
D50	445	50	139	G50
D65	445	65	165	G65
D80	700	80	216	G80
D100	755	100	216	G100
D125	1210	125	315	G125
D150	1210	150	345	G150
D200	1725	200	525	G200
D250	1730	250	600	G250
D300	1760	300	650	G300
D350	1795	350	700	G350


SdB-入口消音器 SUCTION SILENCER



Unit:mm

MODEL	A	B	C	D	適用機型
S50	660	50	165	110	S50
S6065	695	65	165	140	S6065
S757780	925	80	216	170	S757780
S90100	1010	100	216	170	S90100
S110125	1465	125	315	220	S110125
S150160	1550	150	345	⌀300	S150160

安全閥 RELIEF VALVE



Unit:mm

MODEL	A	B	C	適用機型
R15	100	1/2"	15	G25~G40
R40	190	1.5"	23	G50~G100
R50	198	2"	25	G125~G150
R80	306	3"	30	G200~G250
R150	370	6"	150	G300~G350

三通管 T JOINT

Unit:mm


MODEL	A	B	L	適用機型
T50	40	50	150	G50
T65	40	65	150	G65
T80	40	80	169	G80
T100	40	100	173	G100
T125	50	125	213	G125
T150	50	150	213	G150
T200	80	200	270	G200
T250	80	250	300	G250

三通管 T JOINT

Unit:mm

MODEL	A	B	L	適用機型
T300	150	320	350	G300
T350	150	355	400	G350


伸縮接頭 FLEXIBLE JOINT



Unit:mm

MODEL	A	B	L	適用機型
FS50	50	155	150	G50
FS65	65	175	150	G65
FS80	80	185	150	G80
FS100	100	210	150	G100
FS125	125	250	150	G125
FS150	150	280	150	G150
FS200	200	330	200	G200
FS250	250	400	200	G250
FS300	300	445	200	G300
FS350	350	490	230	G350


防震接頭 FLEXIBLE JOINT



Unit:mm

MODEL	A	B	L	適用機型
F50	50	155	105	G50
F65	65	175	115	G65
F80	80	185	135	G80
F100	100	210	150	G100
F125	125	250	160	G125
F150	150	280	180	G150
F200	200	330	205	G200
F250	250	400	230	G250
F300	300	445	260	G300
F350	350	490	265	G350


逆止閥 CHECK VALVE



Unit:mm

MODEL	D	E	L	適用機型
C50	50	37	17	G50
C65	65	47	18	G65
C80	80	56	19	G80
C100	100	76	20	G100
C125	125	95	23	G125
C150	150	118	24	G150
C200	200	152	27	G200
C250	250	202	27	G250
C300	300	240	37	G300


逆止閥 CHECK VALVE



Unit:mm

MODEL	A	L	適用機型
C300	377	143	G300
C350	420	184	G350


真空過濾筒 SUCTION FILTER TANK



Unit:mm

MODEL	A	B	C	E	H
FT50	452	50	180	216	590
FT65	445	65	180	216	580
FT80	545	80	200	267	705
FT100	545	100	215	267	705
FT125	640	125	275	392	845
FT150	640	150	275	392	845
FT200	820	200	340	492	1045
FT250	1040	250	360	492	1297
FT300	1290	300	412	612	1590

管接頭 CONNECTOR




Unit:mm

MODEL	A	C	L	適用機型
TC40	65	40	20	G40
TC50	95	50	20	G50
TC65	95	65	20	G65
TC80	95	80	20	G80
TC100	95	100	20	G100
TC125	155	125	20	G125
TC150	155	150	20	G150
TC200	155	200	20	G200
TC250	155	250	20	G250

安裝圖 Installation

壓送型 Pressure Type

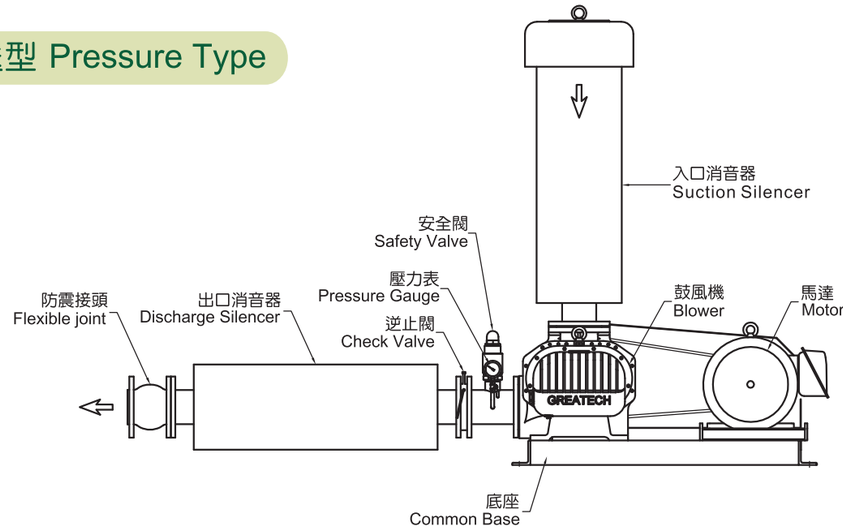

真空型 Vacuum Type

